Jaw Installation Instructions
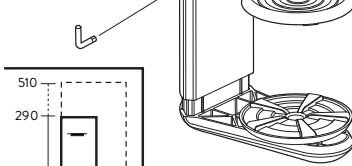
CPU/013

MAX 25kg (55.1lb)

Adjustable CPU cradle

List of parts:
JAW CPU holder
M6 bolt
shoulder washer
plastic washer (black)
clamping disc
M6 Nyloc nut
rubber pad
short allen key

510
290
(mm)
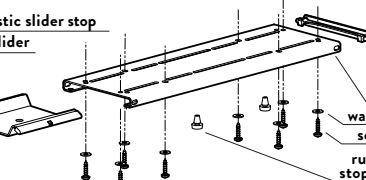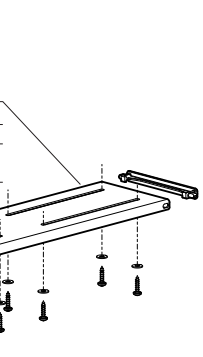90 240
Min/Max CPU Dimensions

Mounting options

CPU holder mounting with rotating function
UNI/ROT

CPU holder fixing Slide & Rotate
UNI/SR350

CPU holder fixing Slide & Rotate
UNI/SR520

plastic slider stop
slider

rail
washer
screw
rubber stoppers

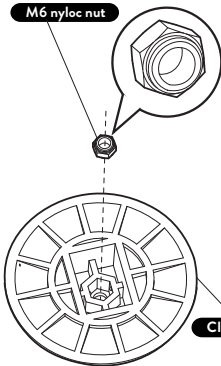⚠ **IMPORTANT**
Use fixings supplied with fixings supplied with JAW - as described below
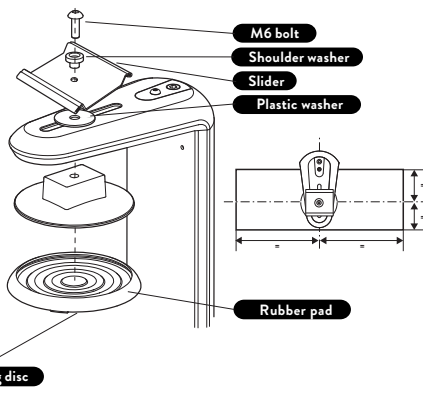
Assemble the JAW

Fit the slider plate

1A Insert nyloc nut into clamping disc. It should 'snap' into place.

M6 nyloc nut

**1B** Fit the slider plate. If necessary, adjust upper and lower clamp pads to hold CPU centrally.

M6 bolt
Shoulder washer
Slider
Plastic washer

Rubber pad

Clamping disc

Fix your CPU

2 Unwind JAW to open up then tighten on CPU using allen key supplied.

short allen key

⚠ **NOTE**
The use of excessive force when tightening may result in the damage of your CPU
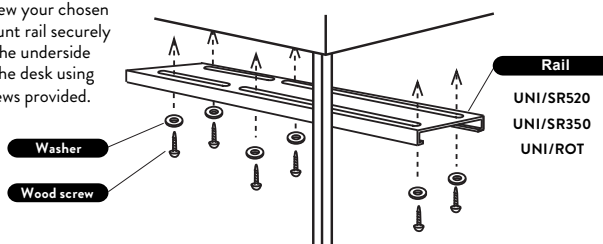
Recommended tightening torque 1.5Nm to 2.5Nm

Mount to furniture

Preparation

3 Make sure the CPU has enough space to rotate if required.

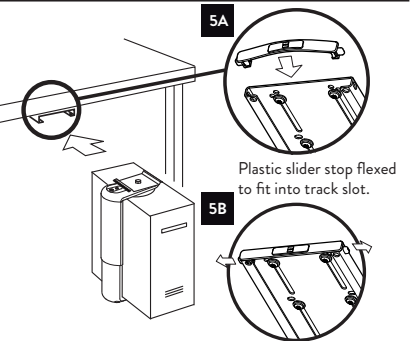## Mounting the bracket to the underside of the desk

4 Screw your chosen mount rail securely to the underside of the desk using screws provided.

Rail
UNI/SR520
UNI/SR350
UNI/ROT

Washer
Wood screw

Insert the JAW

5 Slide the JAW into the rails then insert the plastic slider stop.

⚠ Check CPU is sufficiently gripped by JAW before insertion into mounting bracket

5A

Plastic slider stop flexed to fit into track slot.

5B

⚠ **WARNING**
- Ensure desk is suitable to take the weight of the CPU holder and CPU.
- Do not use this product for any purpose other than that for which it was designed.
- Hold the CPU tightly when making adjustments.
- Care should be taken to avoid trapping fingers.
- Do not dismantle or modify the CPU cradle.
- Supported weight must not exceed 25kg (55lb) per cradle.

CE

⚠ **MAINTENANCE AND INSPECTION**
- Ensure all screws are tightened and occasionally adjust if needed.
- Clean with a damp cloth, NO solvents.

⚠ **DISCLAIMERS**
- The use of power tools, lever bars or excessive force during the installation, or reconfiguration of the product will invalidate your guarantee.
- Failure to observe the recommendations in the use, and configuration of these products may affect your guarantee.
- As part of Colebrook Bosson Saunders ongoing product improvement programme, the design of products may change without prior notice and details may vary from those illustrated.

⚠ **PATENTS**
- Colebrook Bosson Saunders hold a number of patents and other intellectual property rights covering our products and processes.
- You can find patent information on our website at: www.colebrookbossonsaunders.com/patents

colebrook bosson saunders